



GRAMEGNA®
THE ITALIAN PACKAGING SINCE 1960

TTK 5600 MPE
Automatic packaging machine L
Sealer
Fully electric and servo assisted
Sealing bar 600x400 mm
h. Max product 160



Description

The new version of **TTK 5600 MPE** is the product of careful attention to market requirements with the purpose of proposing a technologically advanced and at the same time versatile and "user-friendly" heat shrink packaging machine. Enhanced with strong electronic, mechanical and technological contents, the new **TTK 5600 MPE** heat shrink packaging machine, suitable for operation on both sides thanks to its double hatch, represents a perfect synthesis of reliability, high performance, versatility and safety, bringing a new standard to the way of conceiving automatic packaging machines with heat-shrink film.

Plus

- Simple and functional design
- Front and rear opening for easy access
- Simple, operator-friendly graphics
- Option of entering pictures of the products on the touch screen
- USB port to save recipes and updates
- Servo assisted sealing bar
- Motorised film opening triangles
- Enlarged infeed belt to facilitate standard loading operations

Optionals

- Wipe-up kit for liquids
- Electric punching kit
- Photocell Kit for printed film
- Photocell Kit for film end
- Photocell Kit - Reel end warning
- Photocell Kit - Product infeed reading
- Guide Kit for unstable products
- Guide Kit for unstable products (h. min. -105mm) + rollers
- Guide Kit for unstable products or cylindrical shape h. min 45 mm
- 5 Photocells Kit for irregular shaped products
- Photocell Kit for non-transparent film
- Wireless keypad kit
- Photocell kit for short products and non-transparent film
- Photocell kit for transparent products
- Photocell kit for transparent products (infeed)
- X1 JET printer kit
- Product presser kit 300x200
- 32 needles wheel kit

Optionals

- Anti-crease rod kit
- Air blower kit (front bar)
- Trolley kit for fast reel change
- Long exit guide rail kit
- Kit guide roller for infeed belt
- Remote assistance cassette kit
- Remote assistance module kit (mounted in the machine)
- Kit for cleaning infeed belt
- Kit Easy open
- Antistatic brush kit
- Loading kit for CD
- Kit Powermeter (Industry 4.0)
- Aligner Kit
- Aligner Kit (Applied on a 1mt belt between sealer and tunnel)
- Pedal kit
- Infeed belt bottom carter perforated - for high humidity environments
- 3G / UMTS key for Secomea
- Blue food belt (inverted pyramid)
- Exit roller with protection - For Pratika alone use (without shrink tunnel)



GRAMAGNA®
THE ITALIAN PACKAGING SINCE 1960

TTK 5600 MPE

Automatic packaging machine L

Sealer


Fully electric and servo assisted

Sealing bar 600x400 mm

h. Max product 160

Technical Features

Electrical power supply	V	230 1Ph
Maximum power installed	kW	2,5
Maximum electrical absorption	A	11
Hourly output	p/h	up to 3600
Max Reel Dimensions (Ø x lenght)	mm	Ø300x700
Max Product Dimensions (width x height x length)	mm	400x160 lg.600
Infeed conveyor height	mm	870 (on wheels) - 830-910 (on supports)
Machine dimensions (open hatches) / (width x height x length)	mm	2893x1720x1980
Machine dimensions (closed hatches) / (width x height x length)	mm	2518x1240x1558
Machine packing dimensions	mm	2980x1530x2000
Weight (Net/Gross)	kg	573/714
Machine Color		RAL7035

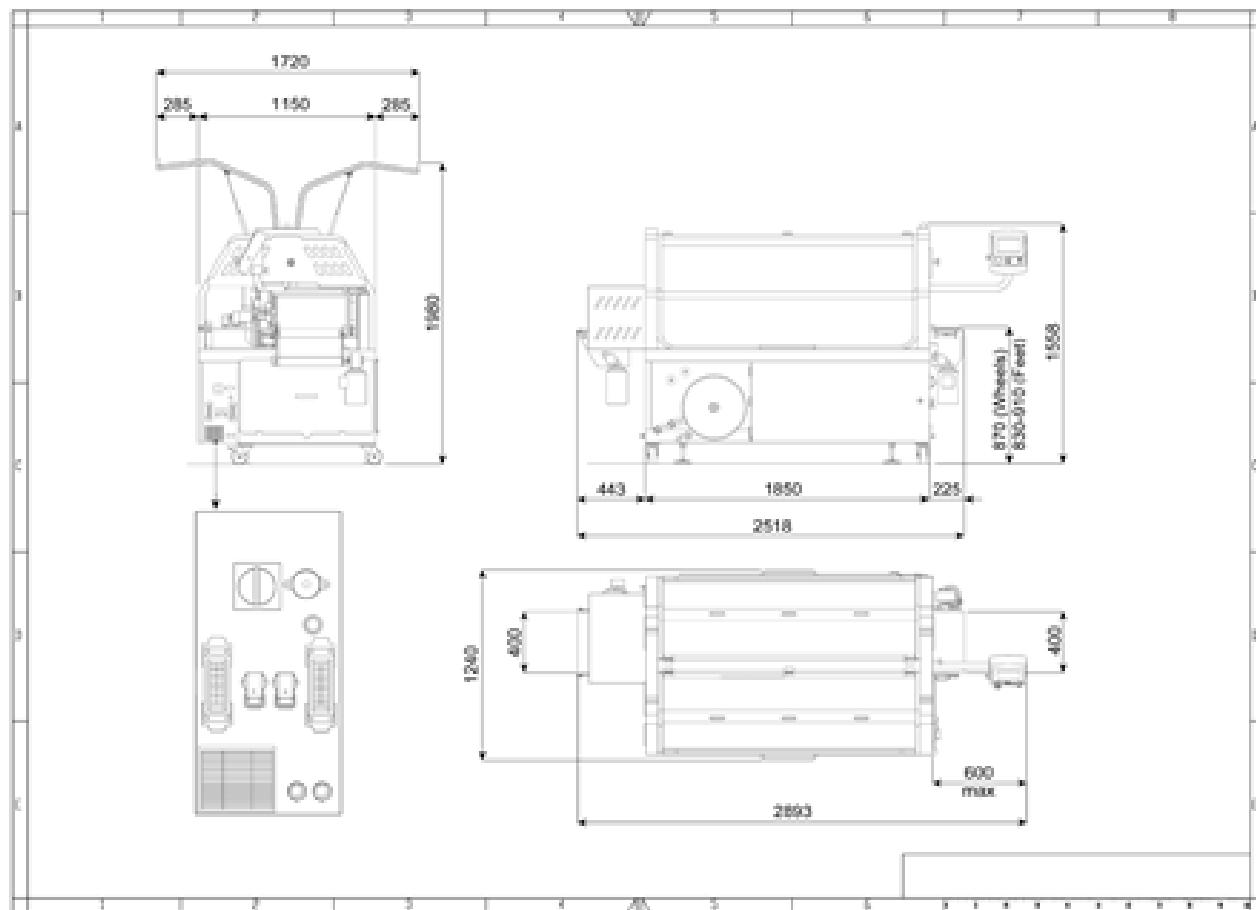

Gramagna Packaging S.r.l.

Via E. Baschenis, 5 - 24044 DALMINE (BG) - Italy

C.F / P.Iva: 03389800164

www.gramegna-packaging.com

info@gramegna-packaging.com