




GRAMEGNA®
THE ITALIAN PACKAGING SINCE 1960

X-BAG

Vertical bagging machine
PLC and touch screen control
Suitable for different types of film

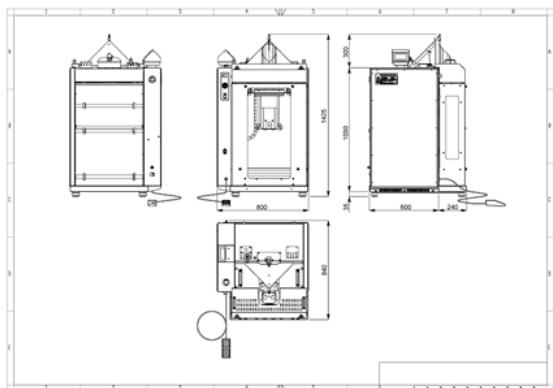

Plus

- Simple to use. Simple to maintain. Simple to install
- X-BAG evo is the ideal solution for those who need to quickly bag small quantities of materials (fresh food, small industrial components, etc.), in hermetic packages, in different formats and with different types of films.
- X-BAG evo makes packaging simple: that's why it offers a genuine alternative to time-consuming manual packaging - and even to automated packaging with its larger and more complex machines, which are often inadequate for actual packaging requirements and come with higher operating and maintenance costs.
- Practical and handy, the X-BAG evo can operate in continuous or pulse-based mode. It's so compact it can be placed in any kind of environment, even in restricted spaces.

Technical Features

Electrical Power Supply	V	220/240
MAX power installed	kW	0.5
Pneumatic supply	bar	40l/m up to 6 bar
Hourly output	p/h (pph)	0-1000
MAX Reel Dimensions (diameter)	mm	250
MAX Reel Strip Dimensions (width)	mm	360/410/520
Film thickness	micron	15/50
Bag length	mm	50/330 (mm 580 with belt)
Bag width	mm	170/185/235 (depending on collar)
Type of film that can be used	type	Polyethylene, polyolefin, macro-perforated, coupled, biodegradable films, cartene plastic, printed films)
Horizontal sealing	type	Double strip and cutting line
Machine dimensions	mm	800x850x1500
Machine weight (Net/Gross)	kg	130/165(MF99MB75) 135/170(MF99MB76)